



Profil výstuhy

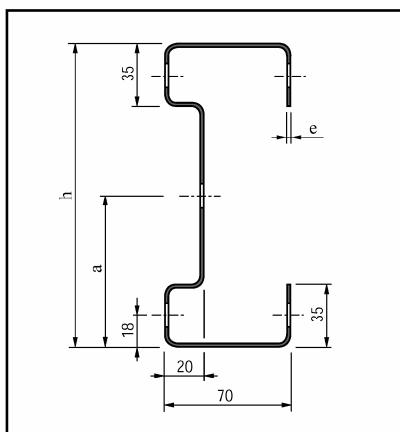

Profil « C » uzavretý

Nízka hmotnosť
Jednoosovo symetrický
Pozinkovaný
Rýchla a jednoduchá montáž
Váznice až do dĺžky 15 m

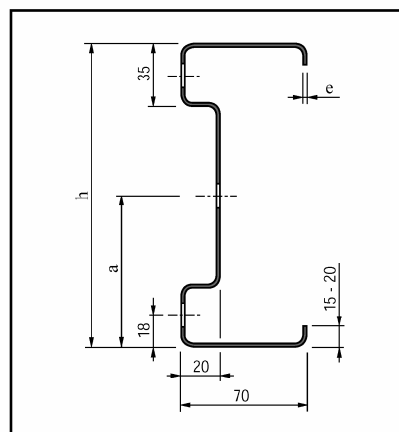

Profil « C » otvorený

Vyľahčený
Jednoosovo symetrický
Pozinkovaný
Rýchla a jednoduchá montáž
Váznice až do dĺžky 15m

	C120	C140	C170	C200		C230			C260					C300			C350		
H (mm)	120	140	170	200		230			260					300			350		
A (mm)	60	70	85	100		115			130					150			175		
E (mm)	1,50	1,50	1,50	1,50	1,80	1,50	1,80	2,00	1,80	2,00	2,40	2,70	3,20	2,40	2,70	3,20	2,70	3,20	3,70
Plocha	5,46	5,76	6,21	6,66	7,97	7,11	8,51	9,44	9,05	10,01	12,01	13,48	15,91	12,97	14,56	17,19	105,91	18,79	21,65
Váha	4,29	4,52	4,857	5,23	6,26	5,58	6,68	7,41	7,10	7,88	9,43	10,58	12,49	10,18	11,43	13,43	13,49	14,75	17,00
IX (cm ⁴)	116,19	168,38	268,46	396,48	473,09	554,48	661,91	732,91	889,03	984,63	1173,93	1314,27	1545,10	1659,27	1858,33	2186,08	2703,20	3181,90	3653,90
IX/VX (cm ³)	19,36	24,05	31,58	39,64	47,30	48,21	57,55	63,73	68,38	75,74	90,30	101,09	118,85	110,62	123,88	145,73	154,46	181,82	208,79
IX (cm)	4,61	5,40	6,57	7,71	7,70	8,83	8,81	8,81	9,91	9,90	9,88	9,87	9,85	11,31	11,29	11,27	13,03	13,01	12,99
IY (cm ⁴)	36,07	36,34	36,69	37,00	43,77	37,27	44,08	48,51	44,36	48,81	57,46	63,71	73,70	57,87	64,16	74,21	64,64	74,76	84,35
IY/VY (cm ³)	10,30	10,38	10,48	10,57	12,50	10,64	12,59	13,86	12,67	13,94	16,41	18,20	21,05	16,53	18,33	21,20	18,46	21,36	24,10
IY (cm)	2,57	2,51	2,43	2,35	2,34	2,28	2,27	2,26	2,21	2,20	2,18	2,17	2,15	2,11	2,10	2,07	2,01	1,99	1,97

Rozmery sú uvedené v mierach brutto.